

# A New Pow<sup>®</sup>

Made In Taiwan

Quiet

Green

Safe



**Light Tank<sup>®</sup> Series**  
Mobile LED Lighting AC Power Trolley



**Power Tank Series**  
Mobile AC Power Trolley

Flexible



# LiFePO<sub>4</sub> Battery

## Cleaner Than Generator

- ◆ AC 110V or (220V) Output, Supports 2000W High Power Electric Tools
- ◆ 110V or ( 220V) 2 AC input
- ◆ AP4830 LiFePO<sub>4</sub> 2.6KWH Capacity. Expandable to 3.9KWH
- ◆ AP4844 Li-NMC 4KWH Capacity. Expandable to 6KWH
- ◆ 110V AC input / 220V or Solar-In DC 145V Recharging
- ◆ \*Foldable Solar Panel
- ◆ Modularized Design, Easier Maintenance
- ◆ 4 Independent Light Switches, 10 hrs. Service

Money Saving

Modularized

Hi-Capacity

Scalable

Solar

\*Optional



PV IN



Electric Tools



Railroad Construction



Night Golfing



# Bright and Efficient

- ◆ Adjustable Lighting Angles
- ◆ 18 Chips per Each Lamp
- ◆ 60W White Color LED
- ◆ Lightbeam, 21000 Lumens (Total)
- ◆ IP54 Dustproof and Waterproof
- ◆ Electric Lift-Rod , 4 Meters (Max.)

Nichia  
LED

Electric  
Lift-Rod

Bright



Multi-Angle Adjustable  
\*Power Tank® (Not included)



Lift-Rod Controller



Electric Lift-Rod



Electric Tools



Night Soccer



Constructions



Rescue

# Robust and Versatile



- ◆ Dual Wheel Brake System
- ◆ Socket Stainless Cover Protection
- ◆ IP 54 Waterproof. Wading Depth (20cm)
- ◆ Capacity Status Window
- ◆ Intelligent Leakage Detection
- ◆ 10" RunFlat All-Terrain Tires
- ◆ Cabinet Design, Easy Expansion



Dual Brakes




Capacity Status Window



Stainless Cover & Independent Switches

Wherever You Are, The Light Tank® Is On Your Side!

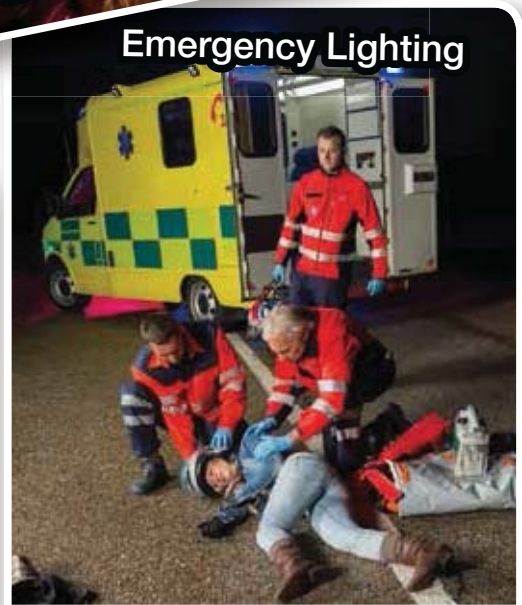

## Light Tank® Spec.

Type	AN021130L	AN022230L	AN021144L	AN022244L
Model	AP4830		AP4844	
AC Input Voltage	95~140V	170~280V	95~140V	170~280V
AC Output Voltage	110V	230V	110V	230V
Rated Power	2000VA	3000VA	2000VA	3000VA
Max. Charging Voltage	54.8V		54.6V	
Rated Voltage	48V		48V	
Battery Capacity	1.3KWH*2		2KWH*2	
Max. Expansion	1.3KWH*3		2KWH*3	
PV IN (DC)	DC 60~145V			
Max. Charging Current (AC+PV)	60A			
Operating Temp.	0~60°C			
Operating Humidity	~85%RH			
LED Lamp	60W*4, 21000lm			
Lift-Rod	Electric Lift-Rod, 4 Meters (Max.)			
Weight	Stainless Steel 240Kg/Aluminum 170Kg			
Dimensions (L*W*H)	1200*600*2160mm			

## Power Tank® Spec.(Lift-Rod / LED Lamps Not Included)

Type	AN021130P	AN022230P	AN021144P	AN022244P
Model	AP4830		AP4844	
AC Input Voltage	95~140V	170~280V	95~140V	90~280V
AC Output Voltage	110V	230V	110V	230V
Max. Rated Output	2000W	3000W	2000W	3000W
Max. Charging Voltage	54.8V		54.6V	
Rated Voltage	48V		48V	
Battery Capacity	1.3KWH*2		2KWH *2	
Max. Expansion	1.3KWH *3		2KWH *3	
PV IN (DC)	60~145V			
Max. Charging Current (AC+PV)	60A			
Operating Temp.	0~60°C			
Operating Humidity	~85%RH			
Weight	Stainless Steel 200Kg/Aluminum 130Kg			
Dimensions(L*W*H)	1200*600*1230mm			

## Battery Spec.

Item	AP4830	AP4844
Batter Type	LiFePO <sub>4</sub>	Li-NMC
Battery Capacity	1.3KWH	2KWH
Rated Voltage	48V	48V
Max. Charging Voltage	54.8V	54.6V
Weight	23Kg	22Kg
Cycle Life (Remaining Capacity 80%)	1000	500

## LED Lamp Spec.

Item	Spec.
Input Voltage	18~21V
Max. Current	3A
Power Consumption	60W
Weight	3.9kg
Luminance	5270lm
Dimensions (L*W*H)	295*528*72mm

## Optional

### Solar Panel Spec.

Type	Q'ty	Dimensions(L*W*H)	Weight	Voltage	Rated
Single	1	1019*992*40mm	12Kg	22.51V	150W
Standard	6	1019*992*40mm*6	72Kg	135.06V	900W

### Lightweight Solar Panel Spec.

Type	Q'ty	Dimensions(L*W)	Weight	Voltage	Rated
Single	1	1000*400*8mm	1Kg	6V	50W
Standard	18	1000*400*8mm*18pcs	18Kg	108V	900W
Muilti-Type	24	1000*400*8mm*24pcs	24Kg	144V	1200W



This product cannot be high-speed towed.

ANEWPOW possesses the right to modify and or change the specifications without prior notice.

# ANewPow®

## 新銳動能有限公司

13F., No.29-2, Sec. 2, Zhongzheng E. Rd.,  
251 Tamsui Dist., New Taipei City, Taiwan

TEL: 886 2 2809 1616

FAX: 886 2 2809 3363

www.anewpow.com

info@anewpow.com

Distributors